


TYPE	SHIELD	PART NO.	AWG	NOMINAL OD (INCH)		NEC TYPE	SHIP WT / 1M'
				CORE	CABLE		
RG 59	95% BC	8-9593	20 BC	.138	.196	CMP	28
	95% BC	8-9599	22 CCS	.135	.200	CMP	28
RG 6	95% BC	8-9006A	18 BC	.170	.225	CMP	36
RG 11	90% BC	8-9011	14 BC	.275	.345	CMP	76

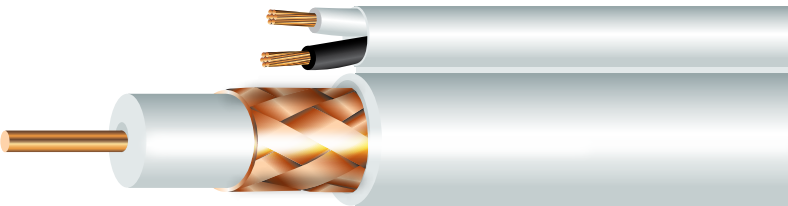

SIAMESE

TYPE	SHIELD	PART NO.	AWG	NOMINAL OD (INCH)		NEC TYPE	SHIP WT / 1M'
				CORE	CABLE		
RG 59	95% BC	8-9992	20 BC + 18/2 BC	.138	.190 x .350	CMP	45
	95% BC Foil + Drain	8-9913	20 BC + 18/2 BC	.138	.190 x .380	CMP	50
RG 6	95% BC	8-9996	18 BC + 18/2 BC	.170	.225 x .390	CMP	54

The information contained on this specification is intended to be used as a guide and every effort has been made to ensure its accuracy at time of publication. This specification is subject to change anytime without notice. Please refer to www.adcable.com for the most up to date information. Rev 0419

PRODUCT DESCRIPTION

Foamed FEP dielectric core over solid/stranded copper or copper covered steel center conductor, copper braid shield, overall white plenum jacket*.

APPLICATIONS

- Audio/Video
- CATV

SPECIFICATIONS

Nominal Impedance 75 Ohm
Nominal Velocity of Propagation 84
Nominal Capacitance 15.8
Temp. Rating -5°C to +75°C
Attenuation see chart on page 47
 (RG6 & RG11 are 3GHz swept tested)

AVAILABLE PUT-UPS

1,000' Reels and Boxes
 500' Reels and Boxes
 Other lengths available. Please consult your factory representative for availability.

CABLE IDENTIFICATION

RG X XX AWG c(UL)us TYPE
 CMP E179333

Siamese Print:

1C/XX AWG RG X 2C/18 AWG
 c(UL)us TYPE CMP E179333

*Other colors available upon request.
 Please consult factory for minimums and lead times.



(800) 343 2579 • www.adcable.com