


| TYPE | SHIELD | PART NO. | AWG | NOMINAL OD (INCH) | | NEC TYPE | SHIP WT / 1M' |
|-------|--------|----------|--------|-------------------|-------|----------|---------------|
| | | | | CORE | CABLE | | |
| RG 59 | 95% BC | 8-9593 | 20 BC | .138 | .196 | CMP | 28 |
| | 95% BC | 8-9599 | 22 CCS | .135 | .200 | CMP | 28 |
| RG 6 | 95% BC | 8-9006A | 18 BC | .170 | .225 | CMP | 36 |
| RG 11 | 90% BC | 8-9011 | 14 BC | .275 | .345 | CMP | 76 |

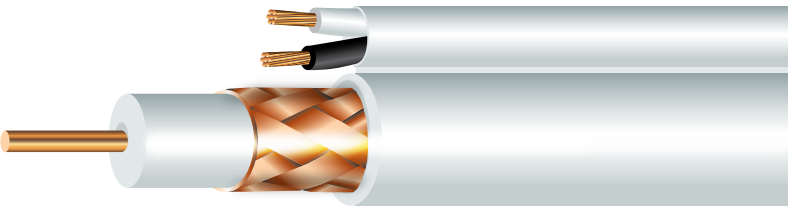

SIAMESE

| TYPE | SHIELD | PART NO. | AWG | NOMINAL OD (INCH) | | NEC TYPE | SHIP WT / 1M' |
|-------|---------------------|----------|-----------------|-------------------|-------------|----------|---------------|
| | | | | CORE | CABLE | | |
| RG 59 | 95% BC | 8-9992 | 20 BC + 18/2 BC | .138 | .190 x .350 | CMP | 45 |
| | 95% BC Foil + Drain | 8-9913 | 20 BC + 18/2 BC | .138 | .190 x .380 | CMP | 50 |
| RG 6 | 95% BC | 8-9996 | 18 BC + 18/2 BC | .170 | .225 x .390 | CMP | 54 |

The information contained on this specification is intended to be used as a guide and every effort has been made to ensure its accuracy at time of publication. This specification is subject to change anytime without notice. Please refer to www.adcable.com for the most up to date information. Rev 0419

PRODUCT DESCRIPTION

Foamed FEP dielectric core over solid/stranded copper or copper covered steel center conductor, copper braid shield, overall white plenum jacket*.

APPLICATIONS

- Audio/Video
- CATV

SPECIFICATIONS

Nominal Impedance 75 Ohm
Nominal Velocity of Propagation 84
Nominal Capacitance 15.8
Temp. Rating -5°C to +75°C
Attenuation see chart on page 47
 (RG6 & RG11 are 3GHz swept tested)

AVAILABLE PUT-UPS

1,000' Reels and Boxes
 500' Reels and Boxes
 Other lengths available. Please consult your factory representative for availability.

CABLE IDENTIFICATION

RG X XX AWG c(UL)us TYPE
 CMP E179333

Siamese Print:

1C/XX AWG RG X 2C/18 AWG
 c(UL)us TYPE CMP E179333

*Other colors available upon request.
 Please consult factory for minimums and lead times.