


Repel™ Communication

CM/CL3 Water Block/Sunlight Resistant

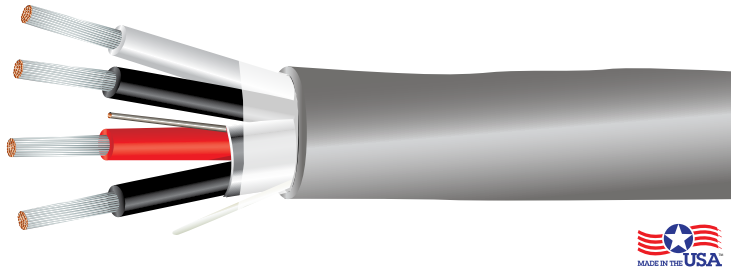

RoHS Compliant

Cables are manufactured to meet current NEC guidelines and are verified by outside standards organizations including cUL)us and c(ETL)us.

PART NO.	AWG/ COND	STRAND	OUTER JKT THICKNESS		NOMINAL OD		SHIP WT / 1M'
			INCH	mm	INCH	mm	
UNSHIELDED							
22 AWG							
2204WB	22/4	SOL	.025	.64	.194	4.95	28
18 AWG							
1802WB	18/1pr	7	.025	.64	.194	4.93	31
16 AWG							
1602WB	16/1pr	7	.025	.64	.228	5.79	39
SHIELDED							
22 AWG							
1202TSDWB	22/1pr	SOL	.025	.64	.200	5.12	21
1222TSDWB	22/1pr	7	.025	.64	.205	5.21	21
20 AWG							
1202TSDWB	20/1pr	7	.025	.64	.220	5.59	24
18 AWG							
1802TSDWB	18/1pr	7	.025	.64	.235	5.97	34
1806TSDWB	18/6	7	.025	.64	.323	8.20	69

PRODUCT DESCRIPTION

PVC insulated stranded tinned copper conductors, short overall twist length, water block tape, and an overall gray PVC jacket. Shielded version has an aluminum tape and drain wire.

SPECIFICATIONS

Conductor	Unshielded - Bare Copper Shielded - Tinned Copper
Insulation	.010" PVC
Jacket	PVC
NEC Articles	800 and 725
Voltage Rating	300 V
Temp. Rating	75°C
Drain Wire	24 AWG

APPLICATIONS

- Security System
- Intercom Systems
- Sound/Audio System
- Power-Limited Controls

COLOR CODE CHART

Cond	Color
1	Black
2	Red
3	White
4	Green
5	Brown
6	Blue

AVAILABLE PUT-UPS

1,000' Reels and Boxes
500' Reels and Boxes
Other lengths available. Please consult your factory representative for availability.